

Plastic Local-Storage Conch Camera



SERIAL PORT CAMERA



**Product:**

VC0706 protocol serial port local-storage black plastic conch camera is a pro-model machine  
Support 1 TF card slot, 24 Pieces LED, 20meters IR distance, DC5V or DC12V input (±5%)

**Application:**

Camera video surveillance for commercial vehicle:




Please ensure that the product work in the appropriate environment



**Packing List:**

Camera	1
Instruction manual	1
Self-Drilling Screw	3
Mounting Plug	3


**Connector:**

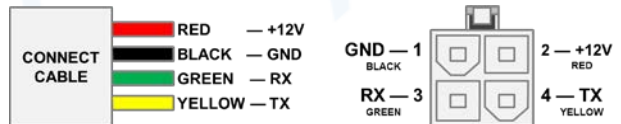

**Product Size:**



**Installation Holes:**



## Specifications:

<b>Model</b>	<b>ASP-347SL-C36B</b>
<b>Specifications</b>	<b>1/4" CMOS VO7725</b>
<b>Picture pixel</b>	<b>0.30 Mega Pixel, 3.5964mmx2.7084mm</b>
<b>Total Pixels</b>	<b>PAL:704(H)x576(V), NTSC:712(H)x486(V)</b>
Image output size	320x240, 480x320, 640x480
Auto Control	Exposure Compensation, White Balance, Electronic Shutter, Day/Night selection
Protocol	VC0706
Communication	Default RS232, Optional RS485 or TTL
Lens	f=3.6mm View Angle 75degree, Optional 2.8, 6.0mm
Light Sensitivity	0.1 Lux @ F1.2 (IR ON)
Infrared Spectrum	850nm or 940nm
Infrared LED Range	Ø 5 LED 24pcs IR 0~20 Meters
Auto IR control	3~5 Lux Cut
Signal to Noise Ratio	SNR> 50 dB, (AGC Close)
Video Output	1V p-p, 75Ω,
Image Mirror	Optional Before Factory
Local Storage	1 TF Card Slot, Support Max 32GB The price not include TF card
Power Consumption	Default DC5V, Optional 12V(± 5%), 300mA, 2.0W
A / V, Power Interface	Non-Joint, Optional 4PIN Interface
Adjustment	Horizontal 0~360, Vertical 0~90
Dimensions	(Ø x H) 93 x 78 mm
Packing Size	(L x W x H) 100 x 100 x 90 mm
Product Weight	Net: 125 g, All: 225 g
Waterproof	IP65 For Housing
Operating Condition	Temp.: -25°C to +55°C, Humidity<95%
Housing Color	Black, Optional Color By Order Quantity

➤ Specifications are subject to change without prior notice