

Metal Goose Egg Serial Port Camera



SERIAL PORT CAMERA



Product:

VC0706 protocol serial port metal goose egg camera is a special outdoor machine
 12 Pieces LED, 12meters IR distance, DC5V or DC12V input ($\pm 5\%$)

Application:

Camera video surveillance for commercial vehicle:




Please ensure that the product work in the appropriate environment



Packing List:

Camera	1
Instruction manual	1
Self-Drilling Screw	2
Mounting Plug	2


Connector:

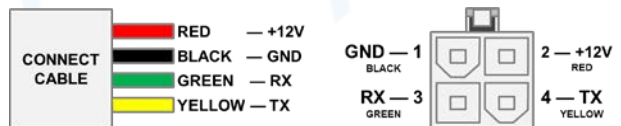

Product Size:



Installation Holes:

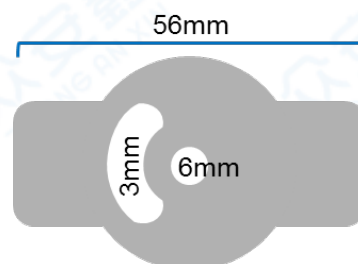

Specifications:

Model	ASP-347SN-E36S
Specifications	1/4" CMOS VO7725
Picture pixel	0.30 Mega Pixel, 3.5964mm×2.7084mm
Total Pixels	PAL:704(H)×576(V), NTSC:712(H)×486(V)
Image output size	320×240, 480×320, 640×480
Auto Control	Exposure Compensation, White Balance, Electronic Shutter, Day/Night selection
Protocol	VC0706
Communication	Default RS232, Optional RS485 or TTL
Lens	f=3.6mm View Angle 75degree, Optional 2.8, 6.0mm
Light Sensitivity	0.1 Lux @ F1.2 (IR ON)
Infrared Spectrum	850nm or 940 nm
Infrared LED Range	Ø 5 LED 12pcs IR 12 Meters, Optional 18pcs IR 20 Meters
Auto IR control	3~5 Lux Cut
Signal to Noise Ratio	SNR > 50 dB, (AGC Close)
Video Output	1V p-p, 75Ω,
Image Mirror	Optional Before Factory
Power Consumption	DC5V, Optional 5V or 12V(± 5%), 135mA, 1.5W
A / V, Power Interface	Non-Joint, Optional 4PIN Interface
Adjustment	Horizontal 0~90, Vertical 0~300
Dimensions	(L x W x H) 60 x 58 x 62 mm
Packing Size	(L x W x H) 80 x 80 x 80 mm
Product Weight	Net: 105 g, All: 175 g
Waterproof	IP66 For Housing
Operating Condition	Temp.: -25°C to +55°C, Humidity < 95%
Housing Color	Silver, Optional Color By Order Quantity

➤ Specifications are subject to change without prior notice