

Product:

Analog High Definition prevent violent destruction flank view slug camera

10 Pieces LED, 12 meters IR distance, DC12V input


Features:

- Zn-Al alloy housing with better waterproof and prevent violence
- > Anti-electromagnetic interference, excellent video output
- > High quality IR LED, no infrared lead exposure facula
- Low power consumption, wide temperature working
- > Easy installation, vehicle flank surface or flush mount

Application:

- Twist off the screws on both sides, camera cable through the hole from the bracket
- > Screws mounting the bracket, sunshield and camera body with screws limited on both sides
- > Power on, adjust the camera until the output image appears appropriate scene, locking screws on both
- > Cable hidden in the body and opening waterproofing, the camera installed

Camera video surveillance for commercial vehicle:

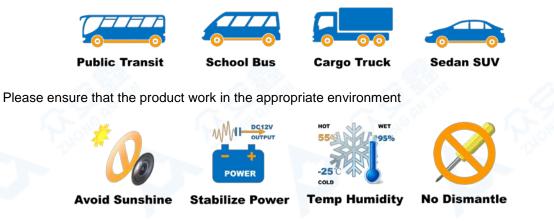

Specifications:

Model	AC-7AP-FCHR	AC-1HP-FCHR
CCD or CMOS	1/3"Sony HAD II CCD	1/3"CMOS 720P
Resolution	700 TVL	1.30 Mega Pixel
Effective Pixels	PAL: 960Hx720V NTSC: 960H×612V	PAL: 1280Hx960V NTSC: 1280H×720V
TV System	PAL / NTSC (Optional Before Factory)	
Auto Control	Auto Gain Control, Back Light Compensation White Balance, Electronic Shutter	
Image Mirror	Optional Before Factory	
Lens	f=2.8mm View Angle 89degree	
	Optional 3.6, 6, 8 mm	
Light Sensitivity	0 Lux @ F1.2 (IR ON)	
Infrared Spectrum	850nm or 940 nm	
Infrared LED Range	10 LEDs Ø5 IR 12 Meters	
Auto IR control	3~5 Lux Cut	
Signal to Noise Ratio	SNR>50 dB, (AGC Close)	
Video Output	1V p-p, 75Ω,	
Audio Output	Paid Optic	onal Audio
Power Consumption	12V DC \pm 5%, 60mA, 0.8W	
A / V, Power Interface	Aviation, 4PIN Interface Optional	
Adjustment	Horizontal 0, Vertical 0~75	
Dimensions	(L x W x H) 90 x 77 x 62.5 mm	
Packing Size	(L x W x H) 85 x 100 x 85 mm	
Product Weight	Net: 225 g, All: 255 g	
Waterproof	IP67 For Housing	
Operating Condition	Temp.:-25°C to +55°C, Humidity<95%	
Housing Color	Black, Optional Color By Order Quantity	

> Specifications are subject to change without prior notice

