

Vehicle Infrared Roc PTZ

PRO
MODLE

PTZ CAMERA



Product:

Intelligent vehicle outdoor long distance IR lighting high-speed roc large Pan Tilt Zoom Cameras

All-weather environment, high strength aluminum alloy shell, impact resistance, corrosion resistance

Features:

- Quickly capture target, infrared night vision distance is greater than 100 meters
- Newest 4th generation reflection type IR LED, the luminous efficiency super elevation
- Horizontal 360 ° unlimited rotation, vertical (+ 90° ~ 90°) rotation, without the blind spots
- Built-in OSD menu, English and Chinese, through the menu change the camera parameters
- Uses 0.9° the precision motor-driven, no vibration smoothly

Application:

- Locking the black bracket on the default location, make the screws waterproofing
- Put the product on bracket, locking the 3 screws, then connect cable at the product interface
- Power on, adjust the camera until the image appears appropriate scene, setting customer function
- Cable hidden in the body and opening waterproofing, the camera installed

Camera video surveillance for commercial vehicle:



Public Transit



School Bus



Cargo Truck



Sedan SUV

Please ensure that the product work in the appropriate environment



Avoid Sunshine



Stabilize Power



Temp Humidity



No Dismantle

Specifications:


Model	AC-18S-PMS	AC-36S-PMS
CCD or CMOS	1/4" EX-view HAD CCD	
Resolution	752H*582V	
Horizontal Resolution	700TVL	
Scanning Frequency	15.625KHz(H) 50Hz(V)	
TV System	PAL / NTSC (Optional Before Factory)	
Synchronization	Internal / Extrinsic	
White Balance	Auto / Manual	
Electronic Shutter	1/1~ 1/10,000s	1/50~ 1/10,000s
Focal Length	f=4.1~73.8mm	f=3.4~122.4mm
Zoom	Optical 18X	Optical 36X
Mini Illumination	0.01Lux @ F1.2 (0Lux, IR On)	
Auto IR Control	Auto / Manual, 3~5 Lux Cut	
Signal to Noise Ratio	SNR > 50 dB, (AGC Close)	
Video Output	CVBS 1.0Vp-p / 75Ω	
Max Speed	Pan: 100°/S; Tilt: 80°/S	
Manually Controlled	Pan: 0°~60°/S; Tilt: 0°~40°/S	
Range	Pan: 360°; Tilt: +90° ~ -90°	
Preset	128 Presets	
Power Supply	DC11V ~ DC18V	
Protection Class	IP66	
Operating Condition	Temp.: -25°C to +55°C, Humidity < 95%	
Dimensions	(L x W x H) 210 x 375 x 240 mm	
Packing Size	(L x W x H) 260 x 350 x 300 mm	
Product Weight	Net: 6250 g, All: 8580 g	

➤ Specifications are subject to change without prior notice

Packing List:

Camera	1
Instruction manual	1
Power Adapter	1
Toolkit	1

Connection:

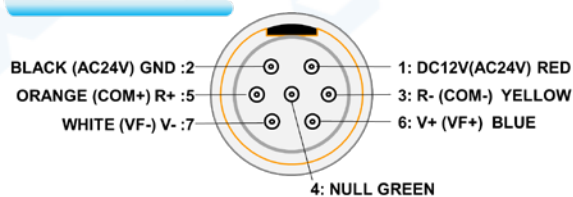

Product Size:



Installation Holes:

