

Product:

Analog High Definition prevent violent destruction rear view baboon camera

18 Pieces LED, 15meters IR distance, DC12V input


Features:

- > Zn-Al alloy housing with better waterproof and prevent violence
- > Anti-electromagnetic interference, excellent video output
- High quality IR LED, no infrared lead exposure facula
- Low power consumption, wide temperature working
- Easy installation, vehicle rear surface

Application:

- > Twist off screws on both sides, camera cable through the hole from the bracket
- > Screws mounting the bracket, sunshield and camera body with screws limited on both sides
- > Power on, adjust the camera until the output image appears appropriate scene, locking screws on both
- > Cable hidden in the body and opening waterproofing, the camera installed

Camera video surveillance for commercial vehicle:

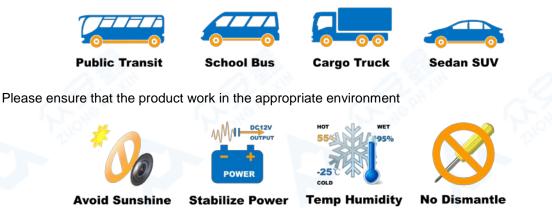

Specifications:

| Model | AC-7AP-RBH AC-1HP-RE | | |
|------------------------|---|-------------------------------------|--|
| CCD or CMOS | 1/3"Sony HAD II CCD | 1/3"CMOS 720P | |
| Resolution | 700 TVL | 1.30 Mega Pixel | |
| Effective Pixels | PAL: 960Hx720V NTSC: 960Hx612V | PAL: 1280Hx960V NTSC: 1280H×720V | |
| TV System | PAL / NTSC (Optional Before Factory) | | |
| Auto Control | Auto Gain Control, Back Light Compensation White Balance, Electronic Shutter | | |
| Image Mirror | Optional Before Factory | | |
| Lens | f=3.6mm View Angle 75degree Optional 2.8, 6, 8mm | | |
| Light Sensitivity | 0 Lux @ F1.2 (IR ON) | | |
| Infrared Spectrum | 850nm or 940 nm | | |
| Infrared LED Range | 18 LEDs Ø5 IR 15 Meters | | |
| Auto IR control | 3~5 Lux Cut | | |
| Signal to Noise Ratio | SNR>50 dB, (AGC Close) | | |
| Video Output | 1V p-p, 75Ω, | | |
| Audio Output | Paid Optional Audio | | |
| Power Consumption | 12V DC \pm 5%, 100mA, 1.2W | | |
| A / V, Power Interface | Aviation, 4PIN Interface Optional | | |
| Adjustment | Horizontal 0~45, Vertical 0~90 | | |
| Dimensions | (L x W x H) 72 x 82 x 78 mm | | |
| Packing Size | (L x W x H) 85 x 100 x 85 mm | | |
| Product Weight | Net: 250 g, All: 355 g | | |
| Waterproof | IP68 For Housing | | |
| Operating Condition | Temp.:-25°C to +55 | Temp.:-25°C to +55°C, Humidity<95% | |
| Housing Color | Black, Optional Color By Order Quantity | | |

> Specifications are subject to change without prior notice

| Packing List: | | Connection: |
|---------------------|------|--|
| Camera | 1 | +12V — 1 2 — 4 — VIDEO VIDEO — 1 0 2 — AUI |
| Instruction manual | 1 | |
| Self-Drilling Screw | 2 | $GND - 2 \bigcirc 3 - AUDIO + 12V - 3 \bigcirc 4 - GN$ |
| Mounting Plug | 2 | Φ — 14mm Φ — 9.8mm |
| Product Size: | | Installation Holes: 44mm |
| 72mm | 82mm | |