

## Product:

Analog HD prevent violent destruction taxi front view bullet low illumination color camera Installed embedded into the vehicle body, Low power consumption, DC12V input

## Features:


- > Zn-Al alloy housing with better waterproof and prevent violence
- > Anti-electromagnetic interference, excellent video output
- > Low illumination, don't need LED compensation infrared
- Low power consumption, wide temperature working
- > Easy installation, vehicle surface or flush mount

## Application:

- Twist off screws on both sides, camera cable through the hole from the bracket
- Screws mounting the bracket, camera body with screws limited on both sides
- > Power on, adjust the camera until the image appears appropriate scene, locking screws on both sides
- > Cable hidden in the body and opening waterproofing, the camera installed

Camera video surveillance for commercial vehicle:

安晶

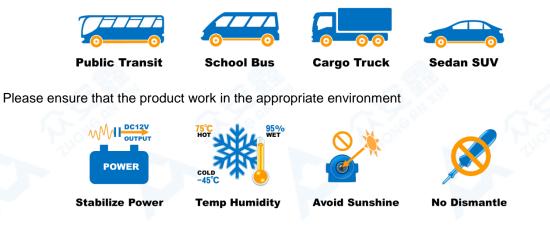

CAMERA

Model	AC-0HP-TMH	AC-1HP-TMH	AC-2HP-TMH
CCD or CMOS	1/3"CMOS 720P	1/3"CMOS 960P	1/3"CMOS 1080P
Resolution	1.00 Mega Pixel	1.30 Mega Pixel	2.00 Mega Pixel
Effective Pixels	1280Hx720V	1280Hx960V	1920Hx1080V
TV System	PAL	/ NTSC (Optional Before Fac	ctory)
Auto Control		in Control, Back Light Comp hite Balance, Electronic Shut	
Image Mirror	VV	Optional Before Factory	
Lens	f	=2.8mm View Angle 89degre	٩
Light Sensitivity	0.01 Lux @ F1.2		
Infrared Spectrum	Infrared-Sensitive		
Infrared LED Range		Null	
Auto IR control		Null	
Signal to Noise Ratio		SNR>50 dB, (AGC Close)	
Video Output		1V p-p, 75Ω,	
Audio Output	Paid	Optional Audio, No Water	proof
Power Consumption	12V DC±5%,65mA,0.8W	12V DC±5%	, 80mA, 1.0W
A / V, Power Interface	Av	viation, 4PIN Interface Optior	nal
Adjustment	H	Horizontal 0~45; Vertical 0~9	0
Dimensions	(	L x W x H) 60 x 46.5 x 50 mr	n
Packing Size		(L x W x H) 70 x 70 x 70 mm	
Product Weight		Net: 125 g, All: 265 g	
Waterproof		Null	
Operating Condition	Tem	p.:-45°C to +75°C, Humidity<	:95%
Housing Color	Black Default, Optional Color By Order Quantity		

> Specifications are subject to change without prior notice

	+12V — 1 4 — VIDEO	
1	GND — 2 3 — AUDIO	+12V — 3 💷 4 — 0
1	ф. 14mm	Φ — 9.8mm
	1	$\begin{array}{c} 1 \\ 1 \\ \end{array} \qquad \qquad$