

Plastic Local-Storage Snail Camera

EXTRA CHEAP

SERIAL PORT CAMERA



Product:

VC0706 protocol serial port local-storage black plastic conch camera is an extra cheap machine

Support 1 TF card slot, 12 Pieces LED, 10meters IR distance, DC5V input ($\pm 5\%$)

Application:

Camera video surveillance for commercial vehicle:



Please ensure that the product work in the appropriate environment



Avoid Sunshine



Communication



Energy Saving



Temp Humidity




No Dismantle

Packing List:

Camera	1
Instruction manual	1
Self-Drilling Screw	3
Mounting Plug	3


Connector:

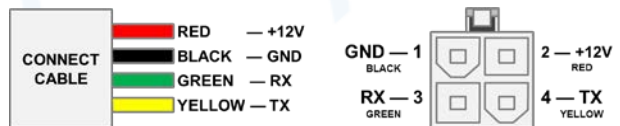

Product Size:



Installation Holes:

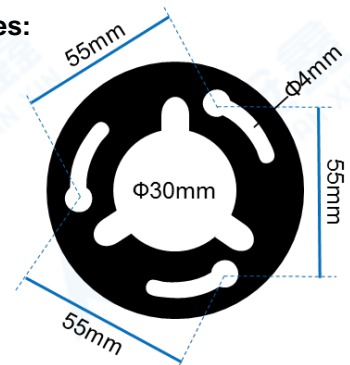

Specifications:

Model	ASP-347SL-S36B
Specifications	1/4" CMOS VO7725
Picture pixel	0.30 Mega Pixel, 3.5964mmx2.7084mm
Total Pixels	PAL:704(H)x576(V), NTSC:712(H)x486(V)
Image output size	320x240, 480x320, 640x480
Auto Control	Exposure Compensation, White Balance, Electronic Shutter, Day/Night selection
Protocol	VC0706
Communication	Default RS232, Optional RS485 or TTL
Lens	f=3.6mm View Angle 75degree, Optional 2.8, 6.0mm
Light Sensitivity	0.1 Lux @ F1.2 (IR ON)
Infrared Spectrum	850nm or 940nm
Infrared LED Range	Ø 5 LED 12pcs IR 0~10 Meters
Auto IR control	3~5 Lux Cut
Signal to Noise Ratio	SNR> 50 dB, (AGC Close)
Video Output	1V p-p, 75Ω,
Image Mirror	Optional Before Factory
Local Storage	1 TF Card Slot, support max 32GB The price not include TF card
Power Consumption	DC5V, Optional 5V (± 5%), 120mA, 0.6W
A / V, Power Interface	Non-Joint, Optional 4PIN Interface
Adjustment	Horizontal 0~360, Vertical 0~90
Dimensions	(Ø x H) 70 x 56 mm
Packing Size	(L x W x H) 80 x 80 x 60 mm
Product Weight	Net: 65 g, All: 125 g
Waterproof	IP65 For Housing
Operating Condition	Temp.: -25°C to +55°C, Humidity<95%
Housing Color	Black, Optional Color By Order Quantity

➤ Specifications are subject to change without prior notice