

Product:

Analog High Definition metallic anti-violence waterproof khaki housing smart infrared color conch camera 24 Pieces LED, 25meters IR distance, DC12V input


Features:

- > Zn-Al alloy housing with lightweight and convenient
- > Anti-electromagnetic interference, excellent video output
- High quality IR LED, Smart infrared without overexposure facula
- Low power consumption, wide temperature working
- > Easy installation, vehicle cabin ceiling type or flush mount

Application:

- Unscrew the pedestal, screws mounting the pedestal on the location of the reservation
- > Cable hidden in the vehicle body hole from the pedestal middle hole, or from side hole of the pedestal
- Power on, adjust the camera until the output image appears appropriate scene
- Locking the two ring fixed the camera ball body, the camera installed

Camera video surveillance for commercial vehicle:

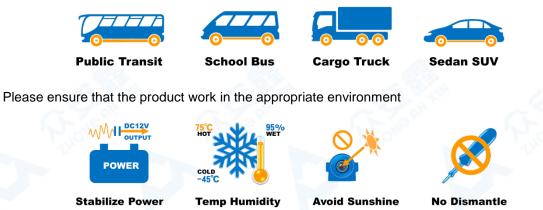

MDVR CAMERA

Specifications:

Model	AC-0HP-CKHR	AC-1HP-CKHR	AC-2HP-CKHR
CCD or CMOS	1/3"CMOS 720P	1/3"CMOS 960P	1/3"CMOS 1080P
Resolution	1.00 Mega Pixel	1.30 Mega Pixel	2.00 Mega Pixel
Effective Pixels	1280Hx720V	1280Hx960V	1920Hx1080V
TV System	PAL / NTSC (Optional Before Factory)		
Auto Control	Auto Gain Control, Back Light Compensation, White Balance, Electronic Shutter		
Image Mirror	Optional Before Factory		
Lens	f=3.6mm View Angle 75degree, Optional 2.8, 6.0mm		
Light Sensitivity	0 Lux @ F1.2 (IR ON)		
Infrared Spectrum	850nm		
Infrared LED Range	24 LEDs Ø5 IR 25 Meters		
Auto IR control	3~5 Lux Cut		
Signal to Noise Ratio	SNR>50 dB, (AGC Close)		
Video Output	1V p-p, 75Ω,		
Audio Output	Paid Optional Audio, No waterproof		
Power Consumption	DC12V±5%,240mA,2.8W	DC12V±5%,	255mA,3.0W
A / V, Power Interface	Aviation, 4PIN Interface Optional		
Adjustment	Horizontal 0~360, Vertical 0~90		
Dimensions	(Φ x H) 97 x H 65 (mm)		
Packing Size	(L x W x H) 100 x 100 x 90 mm		
Product Weight	Net: 225 g, All: 355 g		
Waterproof	IP67 For Housing		
Operating Condition	Temp.:-45°C to +75°C, Humidity<95%		
Housing Color	Khaki Default, Optional Color By Order Quantity		

> Specifications are subject to change without prior notice

Packing List:		Connection:	
Camera	1	+12V — 1 4 — VIDEO VIDEO — 1 2 — AUDIO	
Instruction manual	1	$GND = 2 \bigcirc 3 = AUDIO + 12V = 3 \bigcirc 4 = GND$	
Self-Drilling Screw	4	φ — 14mm φ — 9.8mm	
Mounting Plug	4	$\Psi = 141011$ $\Psi = 5.00011$	
Product Size:		Installation Holes:	