

Product:

Analog High Definition prevent violent destruction rear view monkey camera

18 Pieces LED, 15meters IR distance, DC12V input


Features:

- > Zn-Al alloy housing with better waterproof and prevent violence
- > Anti-electromagnetic interference, excellent video output
- > High quality IR LED, no infrared lead exposure facula
- > Low power consumption, wide temperature working
- > Easy installation, vehicle rear surface

Application:

- > Twist off screws on both sides, camera cable through the hole from the bracket
- > Screws mounting the bracket, sunshield and camera body with screws limited on both sides
- > Power on, adjust the camera until the output image appears appropriate scene, locking screws on both
- > Cable hidden in the body and opening waterproofing, the camera installed

Camera video surveillance for commercial vehicle:

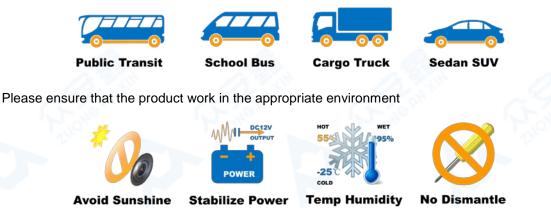

Specifications:

Model	AC-7AP-RMHR	AC-1HP-RMHR	
CCD or CMOS	1/3"Sony HAD II CCD	1/3"CMOS 720P	
Resolution	700 TVL	1.30 Mega Pixel	
Effective Pixels	PAL: 960Hx720V NTSC: 960Hx612V	PAL: 1280Hx960V NTSC: 1280H×720V	
TV System	PAL / NTSC (Optional Before Factory)		
Auto Control	Auto Gain Control, Back Light Compensation White Balance, Electronic Shutter		
Image Mirror	Optional Before Factory		
Lens	f=3.6mm View Angle 75degree Optional 2.8, 6, 8mm		
Light Sensitivity	0 Lux @ F1.2 (IR ON)		
Infrared Spectrum	850nm or 940 nm		
Infrared LED Range	18LEDs Ø5 IR 15 Meters		
Auto IR control	3~5 Lux Cut		
Signal to Noise Ratio	SNR>50 dB, (AGC Close)		
Video Output	1V p-p, 75Ω,		
Audio Output	Paid Optional Audio		
Power Consumption	12V DC \pm 5%, 100mA, 1.2W		
A / V, Power Interface	Aviation, 4PIN Interface Optional		
Adjustment	Horizontal 0~45, Vertical 0~90		
Dimensions	(L x W x H) 70 x 85 x 80 mm		
Packing Size	(L x W x H) 85 x 100 x 85 mm		
Product Weight	Net: 225 g, All: 325 g		
Waterproof	IP67 For Housing		
Operating Condition	Temp.:-25°C to +55°C, Humidity<95%		
Housing Color	Black, Optional Cold	or By Order Quantity	

> Specifications are subject to change without prior notice

 \bigcirc

Packing List:		Connection:	
Camera	1	+12V — 1 2 4 — VIDEO	VIDEO — 1 🗍 2 — AUI
Instruction manual	1	GND - 2 $3 - AUDIO$	+12V — 3 🔍 🖓 4 — GN
Self-Drilling Screw	2		
Mounting Plug	2	Φ — 14mm	Φ — 9.8mm
Product Size:		Installation Hole	es: